


HOGUE BOLT ACTION OVERMOLDED® RIFLE STOCKS


INSTALLATION INSTRUCTIONS

Your new stock is designed for “drop in” installation for all factory firearms; although, due to manufacturing variances in firearms, it is possible for a rifle to exist that will require some minor fitting. This should be done by a competent gunsmith. If you have any problems installing your **OverMolded®** Series Rifle Stock, please call us at (805) 239-1440. We will be glad to help make sure your stock fits perfectly.

1. **Before starting to work, MAKE SURE RIFLE IS UNLOADED!**
2. Hinge open the floor plate. Identify if your rifle has two or three screws. Remove screws from the trigger guard/magazine area.

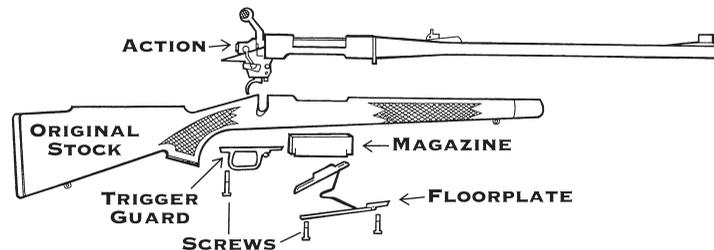

3. Carefully wiggle and remove the trigger guard and floor plate (these parts may be one piece on some rifles). The action and magazine will now be free from the stock. The action will come straight out the top.
4. Reinstall action into your new Hogue stock. The magazine may be inserted into the bottom after the action is in place; make sure it is front-forward. Carefully position the trigger guard and floor plate into the corresponding inlets in the stock. These parts will need to be aligned so that they fit properly together. If they don't immediately fit flush, it may be necessary to position the magazine box with your fingers.
5. Reinstall the screws into their appropriate holes. Before tightening the front and rear screws, hinge the floor plate closed, making sure it has proper clearance to operate. You may need to exactly position the parts before fully tightening the screws.



IMPORTANT INFORMATION ABOUT YOUR HOGUE PRODUCT

This Hogue product should only be used with the specific firearm for which it was designed. Before installing this product, be sure your firearm is unloaded by visually and physically inspecting it in accordance with the manufacturer's instructions and basic firearm safety rules. Read, understand and follow the installation instructions and warnings provided with this product. Check all functions of your firearm after this product is installed and before loading the firearm with live ammunition. If you do not feel competent to perform these checks your local gunsmith can do them for you. Finally, it is important to test fire the firearm after installation of this product but before use in the field to be certain it functions properly and you can handle the firearm safely.

All firearms are potentially dangerous; their handling and use may cause property damage, serious personal injury or death. It is your responsibility to safely store, transport, handle, operate and use your firearm. Proper training is available through accredited firearm safety programs.

CUSTOMER SATISFACTION

Customer satisfaction is our number one priority. If you are not completely satisfied with your Hogue product for any reason please do not hesitate to contact us, we will do our absolute best to assist you. You may, with original proof of purchase, return it to the place of purchase within thirty (30) days for a refund or replacement. Products must be returned with original packaging and all their components.

WARRANTY DISCLAIMER

Due to manufacturing variations in firearms, we do not warrant that this product will function correctly with any specific firearm. Accordingly, this product is sold "AS IS" and "WITH ALL FAULTS." TO THE EXTENT ALLOWED BY LAW, WE SPECIFICALLY DISCLAIM ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

HOGUE®

HOGUE, INC.
PO Box 91360, Henderson, NV 89009
800-438-4747 (800-GET-GRIP)
Hogueinc.com